



HSR 007

TNR® offers a high speed rolling door which provides
• fast open/close speeds • low noise levels • great insulation




High performance, high speed, high security doors
for your challenging needs.

visit us online at www.tnrdoors.com



HSR 007




This high speed rolling aluminum door system comes with a patented curved inside PVC slat profile. This profile serves a wide range of purposes, especially when required for fast opening/closing speeds, has great insulation properties and offers whisper-quiet operation.


- The slightly curved inside PVC slat profile moves very quietly and thus reduces noise even at high speeds of up to 55" per second.
- These PVC slats also provide thermal separation particularly at the hinge joints which are additionally covered by a soft PVC lip.
- Aluminum outside and insulated polyurethane filled profile slats 7/8" (23mm) thick.
- Perforated slats provide ventilation without compromising security.
- Complete perimeter seals are included with each door.
- Sleek profile with easy installation, reduced clearances and minimal maintenance.
- No hinges, cables or pulleys or tension springs.
- Frame-mounted thru-beam photoelectric sensor.




Window Slats for increased visibility



INSULATED SLAT
Interior View




INSULATED SLAT
Exterior View



PERFORATED SLAT



DIRECT DRIVE
OPERATOR

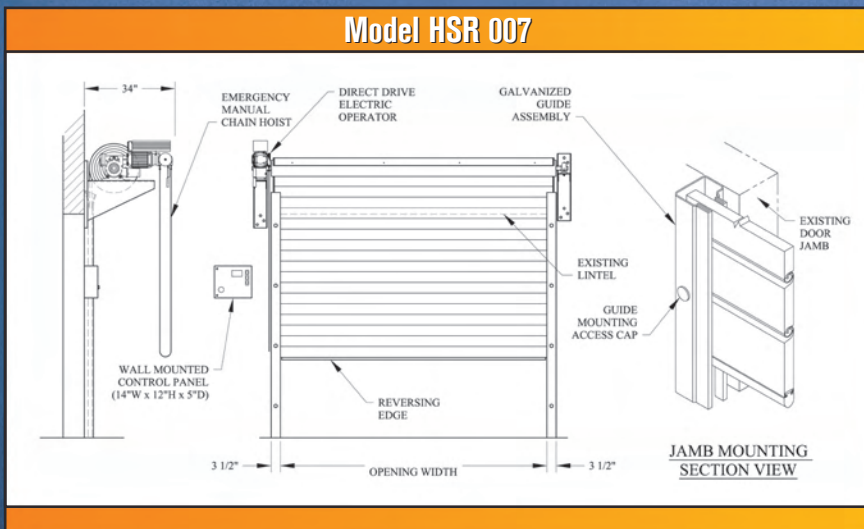

Application:	Exterior or Interior
Door Size:	Maximum 19' 0" wide and 19' 0" high For larger sizes, consult factory
Door Speeds:	Opening speeds up to max 55" per second Closing speeds up to 30" per second
Guides:	Galvanized Steel Guides with hardened PVC slat wear strips
Drive System:	Direct Drive with Safedrive® integrated safety brake complete with inverter drive for soft start/soft stop for a smooth operation
Safety:	Thru-Beam Photoeye, Emergency Stop Button, Reversing Edge, Manual Chain Hoist



Toll free: 1-866-792-9968 Fax: 1-705-735-9564
info@tnrdoors.com