

TROLLEY (ATS) LIGHT-DUTY COMMERCIAL DOOR OPERATOR

LIGHT-DUTY APPLICATIONS



SECTIONAL DOORS

Ideal for Residential or Commercial Doors with Light-Duty Cycle Requirements

CEILING MOUNT

for Standard Lift Sectional Doors

PROVEN PERFORMANCE

BUILT-IN SECURITY+® RECEIVER ALLOWS YOU TO LEARN/PROGRAM UP TO (8) LIFTMASTER® 315 MHz REMOTE CONTROLS AND (1) WIRELESS KEYPAD (KPW250).

MANUAL RELEASE WITH AUTO-RECONNECT TROLLEY MANUAL RELEASE IN CASE OF POWER FAILURE. WHEN POWER IS RESTORED, A PUSH OF THE BUTTON AUTOMATICALLY RECONNECTS THE DOOR AND OPERATOR.

INHERENT ENTRAPMENT PROTECTION AUTOMATICALLY REVERSES DOOR IF OBSTRUCTED WHEN GOING UP.

SAFE AND SECURE

THE PROTECTOR SYSTEM® AUTO-REVERSES THE DOOR IF AN ENTRAPMENT PROTECTION DEVICE DETECTS AN OBSTRUCTION.

UL 325 REQUIRES ALL COMMERCIAL DOOR OPERATORS TO BE EITHER CONSTANT PRESSURE TO CLOSE OR BE EQUIPPED WITH A PRIMARY EXTERNAL MONITORED ENTRAPMENT DEVICE.

RELIABLE

HIGH-STARTING TORQUE MOTOR WITH OVERLOAD PROTECTION.

WARRANTY 1 YEAR.

OPTIONAL ACCESSORIES:

LIGHT LENS COVER

Protects the light bulb and diffuses light.



K108D0036-2

CENTER SUPPORT BRACKET FOR 14 FT. RAIL

Provides additional rail support. Standard with 14' rail, optional for all other door sizes.



50111

POWERFUL ADD-ONS:

REMOTE CONTROLS

Program one or up to three LiftMaster operators. With Security+ Rolling Code Technology 315 MHz, users are assured of a new code with every use.



373LM/371LM

WIRELESS KEYPAD

NEMA 4X (water protection requirements) sealed electronics for reliable outdoor use.



KPW250

WIRELESS KEYPAD

Programmable to Security+ Technology, this keypad provides convenient, secure access with a 4-digit PIN.



877MAX

WIRELESS CONTROL PANEL

Wirelessly opens and closes the door from a secondary location.



378LM

LiftMaster offers accessory solutions for any commercial application. View the full product lineup at LiftMaster.com

MASTERFUL ENGINEERING.

MOTOR




- 1/2 HP, 120V Single-Phase Motor
- Instant Reverse
- Automatic Reset Thermal Overload
- Duty Cycle: Maximum 8 Cycles per Hour; Less than 25 Cycles per Day

COMMERCIAL-GRADE DESIGN



- **Industrial-Strength** Heavy-Duty Steel "I-Beam" Configuration for Increased Rigidity for 8', 10', 12' and 14' Door Heights
- **#48 Chain Drive**
- Meets Requirements for Residential or Light-Duty Commercial Doors
- **Door Speed:** Approximately 8-9 Inches per Second
- **Maximum Door Height:** 14 Feet

MOUNTING DIMENSIONS

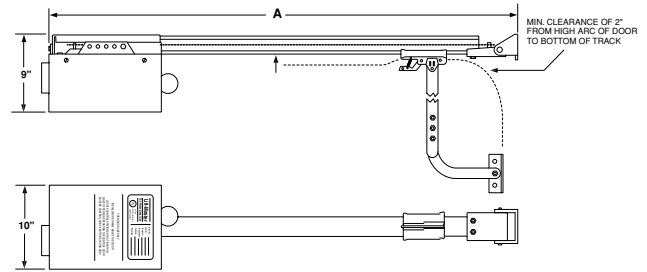

Door Height	8'	10'	12'	14'
A - Dimension	Door Height + 3'-3"	Door Height + 3'-3"	Door Height + 3'-9"	Door Height + 3'-9"

STANDARD SPECS.

BUILT-IN 315 MHz RECEIVER

- 315 MHz radio receiver is integral to the Light-Duty Logic board
- Accommodates up to (8) LiftMaster® Security+® remote controls and (1) Security+ Wireless Keypad

MAXIMUM DOOR AREA (SQ. FT.)

	24 GA. Steel	22 GA. Steel	20 GA. Steel	16 GA. Steel	
STANDARD SECTIONAL	-	24 GA. Steel	20 GA. Steel	16 GA. Steel	-
	Fiberglass	Aluminum Doors	Wood Doors	-	-
	-	-	24 GA. Steel Insulated	20 GA. Steel Insulated	16 GA. Steel Insulated
SQUARE FEET	250	210	180	120	80

NOTE: ON STEEL-INSULATED DOORS, A 24 GA. BACK PANEL IS ASSUMED.

SHIPPING.

SHIPPING WEIGHT

(in lbs.)



CARTON

CARTON

- CARTON DIMENSIONS** 20.0"L x 11.75" x 9.625"W
- Commercial Door Operator (ATS2113X)
 - #48 Chain Rail (Separate Carton)
 - Single Push-Button Control Station (75LM)
 - The Protector System® Safety Reversing Sensors

*Light Lens Cover is optional and must be purchased separately (K108D0036-2)

LIGHT-DUTY APPLICATIONS.

The ATS2113X is for applications using smaller, lighter sectional commercial doors requiring 25 cycles or fewer per day. This operator is ideal for:

- Dock doors
- Small warehouses
- Small businesses
- Outbuildings